

Carlube - The heartbeat of your engine

Technical Data Sheet

Premium Performance and Protection STOU Tractor Lubricant

A farm cannot function without a selection of equipment and machinery, therefore keeping the equipment running in good working order is a key concern to the modern farmer. Nobody understands this better than Tetrosyl's chemists and technicians who have developed a lubricant that allows farmers to concentrate on running their farm without worrying about running their equipment.


Carlube Triple T 15W-40 STOU is a single, universal oil that provides reliable performance and durability to a variety of farming machinery including tractors, crop sprayers, harvesters and more. Carefully designed and tested in a selection of engines, transmissions, wet-brakes and peripheral equipment; Carlube Triple T 15W-40 STOU is a single fluid for almost all applications ensuring that there will be no misapplication.

Proven performance comes in many forms and Carlube Triple T 15W-40 STOU has been built upon extensive testing, with engine soot testing providing results above the limits required by API CH-4 and API CH-4. Gear protection is three levels higher than tests require and piston cleanliness is 66% above the requirements of API CF-4.

Boasting a selection of industry and OEM approvals in place, inventory control couldn't be any easier and peace of mind is assured. Carlube Triple T 15W-40 STOU ensures you can be confident that farm equipment is being well maintained and looked after, providing less wear, less maintenance and more farming.



Wear Protection

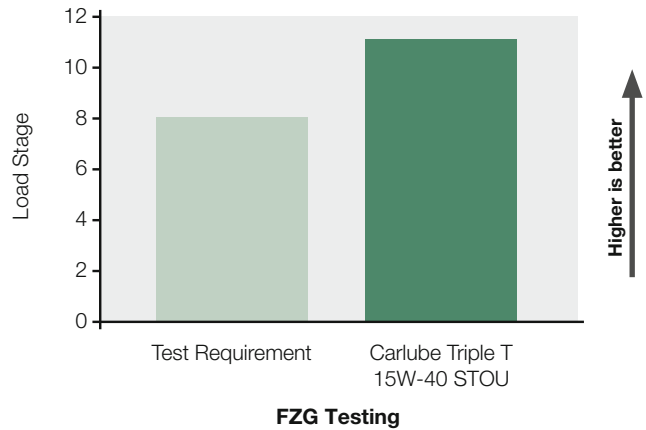

Customers using Carlube Triple T 15W-40 STOU can have the up-most peace of mind knowing their equipment is protected by proven lubricant technology as approved by Industry bodies and Original Equipment Manufacturers (OEMs).

Exceptional Range of Farm Tractor Performance Specifications

Issuing Body	Performance Specification
API	GL-4
Caterpillar	TO-2
Fendt	Vario
John Deere	JDM J27
Massey Ferguson	CMS M1139, M1144, M1145
ZF TE-ML	06B, 06F, 07B

Product Reference

Size	Part No	Barcode
20 Litre	KAN020	
199 Litre	KAN199	

Properties

Property	Result	
SAE Viscosity Grade	15W-40	
Density @15°C (kg/m ³)	885	
Kinematic Viscosity (cSt)	@40°C	101.2
	@100°C	13.7
Viscosity Index (VI)	136	
Pour Point (°C)	-36	



Environmental Protection & Safety Precautions

Do not pour used surplus oil down sewers or drains. Dispose of used or surplus oil at your nearest oil-recycling bank. Dispose of empty packs in a responsible manner. Store container in an upright position and secure when transported. Wear goggles if splashing risk. Avoid exposure to oil mist. When using oil do not eat, drink or smoke. Wash hands after use.

Disclaimer

This Product Information Sheet does not constitute to any extent a fitness for purpose warranty or a quality specification. It is intended to be indicative only of the general characteristics of the product(s) and may not be relied upon (in whole or in part) in substitution of nor as a supplement to any of the information and/or instructions and/or warnings set out on the product(s) and/or on any packaging and/or in the relevant Safety Data Sheet (which is available on request).

Users of a product marked "For Professional Use Only" are deemed to declare and acknowledge for themselves professional levels of skill, knowledge, competence and experience in the selection and use of such product(s).

Product Information Sheets are updated from time to time and inquiries should be made on a regular basis to ensure that this is the latest version available.